

# M 03 06



## Pressure gauge in stainless steel with bayonet closing

Suitable for all gaseous and liquid media that will not obstruct the pressure system or attack copper alloy parts. Especially designed for difficult conditions of use, as there are vibrations or quick changes of pressure. Manufactured according to standard **EN 837-1**

### STANDARD PARAMETERS

Design: <b>EN 837-1</b>
Closing: Bayonet
Mounting: See attached diagram <b>A, B, C or D</b>
Threaded connection: <b>Ø63: ¼" BSP; Ø100-Ø150: ½" BSP (UNE-EN ISO 228-1)</b>
IP protection: <b>IP65 (EN 60529 / IEC 529)</b>
Accuracy: <b>Ø63: Class 1.6; Ø100-Ø150: Class 1.0</b>
Pressure limits:
Static: Full scale
Oscillating: 0.9 end of scale
Maximum: 1.3 end of scale for a short period of time
Temperature limits:
Environment: -20+50°C (Glycerine) / -20+80°C (dry)
Fluid: 100°C (Glycerine), 200°C (dry)
Range: <b>-1...0...1000 Bar</b>
Scale: <b>Bar/Psi, Bar or cmHg</b>
Subdivision: According to standard <b>EN 837-1</b>
Antivibration fluid: <b>Glycerine 99.8% or dry</b>
Pointer: Micrometric adjustment
Sensor element: Bourdon tube (<60 Bar: "C" form; >60 Bar: helical)
Pressure relief system: Blow-out disc
Overtemperature relief system: Upper plug


### MATERIALS

Case: AISI 304 Stainless steel
Bourdon tube and moving parts: AISI 316 Stainless steel
Threaded connection: AISI 316 Stainless steel
Display: Safety glass
Dial: White laquered aluminum
Pointer: Black laquered aluminum
Welding: P<250 Bar: Cu-Sn; P>250 Bar: Cu-Ag / TIG Welding
Blow-out disc and overtemperature relief plug: Neoprene


### Application:

- Ship supplies
- Irrigation systems
- Air conditioning
- Food industry
- Pneumatics
- Hydraulics


### A Bottom

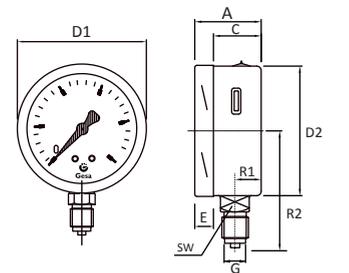


### C Back

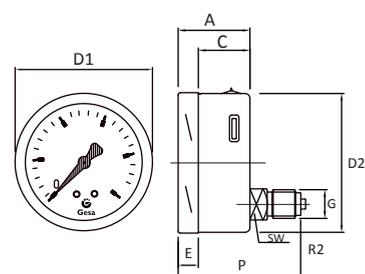

### B Bottom with back flange

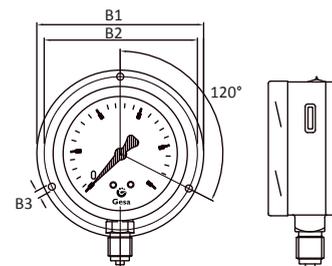

### D Back with frontal flange

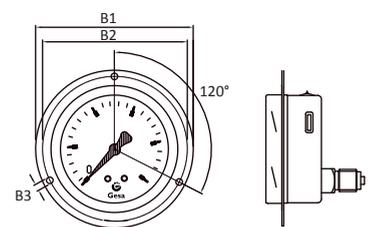

DN	Mounting	DIMENSIONS (mm)											WEIGHT (g)			
		R1	A	C	D1	E	D2	G	R2	SW	P	B1	B2	B3	Without Glycerine	With Glycerine
Ø63	A/B	10	34	22	64	12	62	¼ BSP	55	14	-	86	80	3,5	158	230
Ø63	C/D	-	34	22	64	12	62	¼ BSP	-	14	56	86	80	3,5	157	228
Ø100	A/B	16	49	32	101	17	99	½" BSP	83	22	-	132	124	5	533	867
Ø100	C/D	-	49	32	101	17	99	½" BSP	-	22	86	132	124	5	550	890
Ø150	A/B	16	50	32	149	18	146	½" BSP	113	22	-	192	184	5	950	1712
Ø150	C/D	-	50	32	149	18	146	½" BSP	-	22	87	192	184	5	824	1750

### How to order

#### 1. Case diameter

Ø63    Ø100    Ø150

#### 2. Pressure range (Bar)

-1+0   -1+1.5   -1+5   -1+12   -1+24   0+1   0+2.5   0+6   0+16   0+40   0+100   0+250   0+400   0+1000  
 -1+0.5   -1+3   -1+9   -1+15   0+0.6   0+1.6   0+4   0+10   0+25   0+60   0+160   0+315   0+600   -76+0

#### 3. Pressure scale

Bar    Bar/Psi    cmHg

#### 4. Mounting

**A**   **B**   **C**   **D**

#### 5. Threaded connection

¼" BSP    ½" BSP    ¾" BSP  
 ¼" BSPT    ½" BSPT    ¾" BSPT  
 ¼" SAE    7/16" SAE    M20x150

#### 6. Connection material

AISI 316 Stainless steel

#### 7. Antivibration fluid

Glycerine 99.8%  
Without fluid

#### 8. Calibration certificate traceable to ENAC

7 Points Certificate  
Without certificate

M0306 -

